


BWX Putty Systems

DISPENSE HIGH VOLUMES OF POLYESTER PUTTY

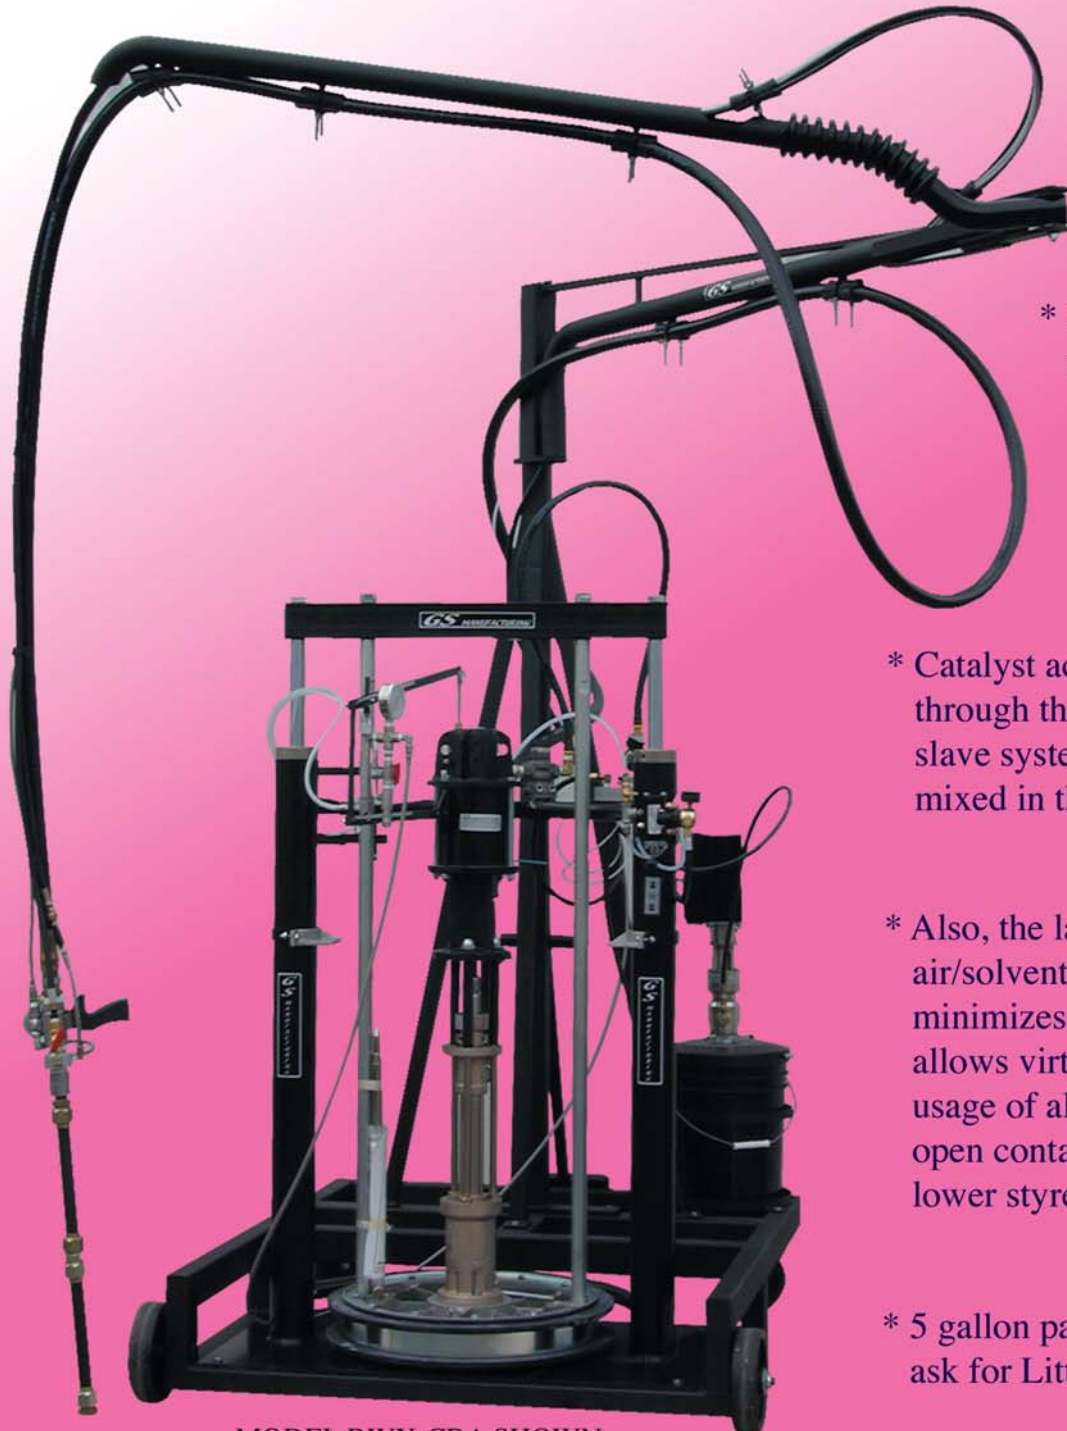

* Material directly from a 55 gallon drum.

* Optional low-boy cart and 12 ft. boom.

* Catalyst accurately metered through the GS designed MEKP slave system and thoroughly mixed in the dispensing nozzle.

* Also, the labor-saving air/solvent purge assembly minimizes cleaning. This unit allows virtually the entire usage of all the putty with no open containers, resulting in lower styrene emissions.

* 5 gallon pail units- ask for Little Willie- LWX

MODEL BWX-CBA SHOWN



GS MANUFACTURING



Phone: 949-642-1500
Fax: 949-631-6770

985 W. 18th Street
Costa Mesa, CA 92627

Web site: www.gsmfg.com
E-mail: gsmfg@pacbell.net

BWX Putty Systems

IDEAL FOR ALL YOUR PUTTY DISPENSING APPLICATIONS



X2002 Dispensing X-GUN®
Low output applications



X2004SP Spray X-GUN® Barrier coats,
Coring materials, Sprayable syntactic putties, Tooling materials



BW1000 Valve gun- High output static mixer
at end of nozzle for minimal waste, solvent/ air flush

Specifications:

- Output- pour up to 25 lbs/min (11.3 kg/min)
 - spray up to 6 lbs/min (2.7 kg/min)
- Catalyst percentage .75%-3% by volume
- Pump ratio 23:1 chop check
- Air requirements 25-30 CFM

Standard Components:

- 55 Gallon ram
- Extrusion pump assembly w/ shuttle valve
- S1000-97 MEKP Slave pump assembly
- BW1000 Hi-output valve gun or X2004 X-GUN®
- 25 Foot hose set
- 2:1 Solvent pump assembly for nozzle flush



LWX Putty systems
Designed for use with 5 gallon pails

Options:

- Additional hose lengths
- MVA01 Low output manual valve gun
- X2004G X-GUN w/ air trigger
- #180 BWX Cart only
- MI-PX Mast only
- RB300-PX Boom only
- X2004SP Spray X-GUN